



Ultra-Low-Power CO₂ sensor with UART and I²C interface

User-Defined power consumption

The CozIR[®]-LP² is an ultra-low power NDIR CO₂ sensor using state-of-the-art solid-state LED optical technology. The low-power LEDs are manufactured in-house, giving GSS complete control of the CO₂ sensor signal chain.

About CozIR[®]- LP²

The CozIR[®]-LP² allows users to reduce power consumption whilst maintaining high CO₂ measurement accuracy. The sensor incorporates a number of power saving modes, capable of reducing active and quiescent current consumption to unrivalled low levels.

The CozIR[®]-LP² also features a built-in auto-calibration function that maintains CO₂ measurement accuracy over the lifetime of the product.

Features

- Ultra-low-power CO₂ sensor
- 30ppm (typ.) measurement accuracy
- Solid state LED optical technology
- UART or I²C control and data interface
- Built-in auto-calibration
- California Building Standards Code, Title 24 compliant

Applications

- Indoor Air Quality (IAQ)
- IoT and Smart Technology wireless equipment
- Air Quality and HVAC Systems
- Building Management Systems (BMS)
- Demand-Controlled Ventilation (DCV) systems
- Transport
- In-Cabin Air Quality

CO₂ Sensor Specifications

Measurement Ranges	0-2000ppm, 0-5000ppm, 0- 10000ppm (0-1%)
Accuracy (typ.)	±(30ppm +3% of reading)
Time to 1st Reading	<1 seconds
Response Time	<30 Seconds (Diffusion limited)
Sample Method	Solid-state LED NDIR Diffusion

Electrical and Mechanical Specifications

Measurement Output	UART or I ² C
Supply Voltage	3.25V - 5.5V
Power Consumption (typ.)	<3.5mW @ 3.3V
Dimensions and Weight	31mm x 19.5mm x 8.7mm, 2.5g

Rev.I_062020_CozIR-LP2_engl • Subject to change



CozIR® Series

Further models from our series



CozIR®-A
with optional temperature and humidity sensing.



CozIR®-Blink
Ultra-Low-Power CO₂ sensor with Power Cycling



CozIR®-LP
Ultra-Low-Power CO₂ sensor



HTK Hamburg GmbH
Frahmredder 49
22393 Hamburg

Phone: +49 (0)40 - 600 38 38 - 0
Fax: +49 (0)40 - 600 38 38 - 99
info@htk-hamburg.com

Gas Sensing Solutions Ltd.
60-62 Grayhill Road
Westfield North Courtyard
Cumbernauld,
United Kingdom, G68 9HQ

© Copyright 2019 - All contents of this document, in particular Texts, photographs and graphics are protected by copyright. All rights, including reproduction, publication, processing and translation are reserved, HTK Hamburg GmbH. Please contact HTK Hamburg GmbH if you would like to use the contents of this document.

Rev.l_062020_CozIR-LP2_engl • Subject to change

Operating Conditions


Operating Conditions - Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-40°C to +70°C
Pressure Dependence	500mbar - 1500mbar
Sensor Lifetime	>15 years
Environmental Compliance	RoHS and REACH

Ordering Information

CozIR®-LP2-X

X	Measurement Range
2000	2000ppm
5000	5000ppm
1	10,000ppm (1%)

Dimension Drawing - CozIR®-LP²

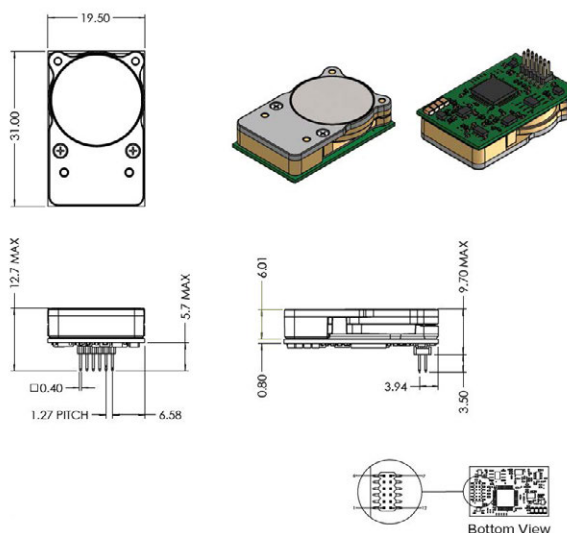

Pin-Out Description - CozIR® Blink

Pin	Name	Type	Description
1	GND	Supply	Sensor ground
2	VDD	Supply	Sensor supply voltage
3	Rx_In	Digital Input	UART Receive Input
4	Tx_Out	Digital Output	UART Transmit Output
5	NC	Unused	Do not connect
6	READY	Digital Output	Data ready pin. Pulsed high when data ready
7	NC	Unused	Do not connect
8	NC	Unused	Do not connect
9	NC	Unused	Do not connect
10	I ² C_ENABLE	Digital Input	Set low for I ² C interface mode. Leave floating to select UART interface mode. Pin status detected at power on.
11	I ² C_SCL	Digital Input	I ² C serial clock input. Open drain, external 4.7kΩ resistor pulled high to VDD required
12	I ² C_SDA	Digital Input/Output	I ² C serial data input/output. Open drain, external 4.7kΩ resistor pulled high to VDD required

