



Ultra-Low-Power CO₂ sensor with UART interface

Fit and forget, fully autonomous operation

The sensor is designed for measuring ambient levels of CO₂ from 0-1%. The CozIR®-LP also features a built-in auto-calibration function that maintains CO₂ measurement accuracy over the lifetime of the product.

About CozIR®-LP

The CozIR®-LP is part of a new generation of ambient CO₂ sensors optimised for low-power applications. The CozIR®-LP uses NDIR solid-state LED optical technology to create a sensor with a small

footprint and ultra-low-power consumption. This makes it ideal for a new generation of portable and battery powered ambient measurement applications that require highly accurate CO₂ measurement capability.

Features

- Ultra-low-power CO₂ sensor
- 30ppm (typ.) measurement accuracy
- Solid state LED optical technology
- UART data interface
- Built-in auto-calibration
- California Building Standards Code, Title 24 compliant

Applications

- Indoor Air Quality (IAQ)
- IoT and Smart Technology wireless equipment
- Air Quality and HVAC Systems
- Building Management Systems (BMS)
- Demand-Controlled Ventilation (DCV) systems
- Transport
- In-Cabin Air Quality

CO₂ Sensor Specifications

Measurement Ranges	0-2000ppm, 0-5000ppm, 0- 10000ppm (0-1%)
Accuracy (typ.)	±(30ppm +3% of reading)
Time to 1st Reading	<1.2 seconds
Response Time	<30 Seconds (Diffusion limited)
Sample Method	Solid-state LED NDIR Diffusion

Rev.I_062020_CozIR-LP_engl • Subject to change



We control GASES - since 1978



CozIR® Series

Further models from our series



CozIR®-A
with optional temperature and humidity sensing.



CozIR®-Blink
Ultra-Low-Power CO₂ sensor with Power Cycling



CozIR®-LP 2
Ultra-Low-Power CO₂ sensor



HTK Hamburg GmbH
Frahredder 49
22393 Hamburg

Phone: +49 (0)40 - 600 38 38 - 0
Fax: +49 (0)40 - 600 38 38 - 99
info@htk-hamburg.com

Gas Sensing Solutions Ltd.
60-62 Grayhill Road
Westfield North Courtyard
Cumbernauld,
United Kingdom, G68 9HQ

© Copyright 2019 - All contents of this document, in particular Texts, photographs and graphics are protected by copyright. All rights, including reproduction, publication, processing and translation are reserved, HTK Hamburg GmbH. Please contact HTK Hamburg GmbH if you would like to use the contents of this document.

Rev.l_062020_CozIR-LP_engl • Subject to change

Electrical and Mechanical Specifications

Measurement Output	UART
Supply Voltage	3.25V - 5.5V
Power Consumption (typ.)	<3.5mW @ 3.3V
Dimensions and Weight	31mm x 19.5mm x 8.7mm, 2.5g

Operating Conditions


Operating Conditions - Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-30°C to +70°C
Pressure Dependence	500mbar - 1500mbar
Sensor Lifetime	>15 years
Environmental Compliance	RoHS and REACH

Ordering Information

CozIR®-LP-X

X	Measurement Range
2000	2,000ppm
5000	5,000ppm
1	10,000ppm (1%)

Dimension Drawing - CozIR®-LP

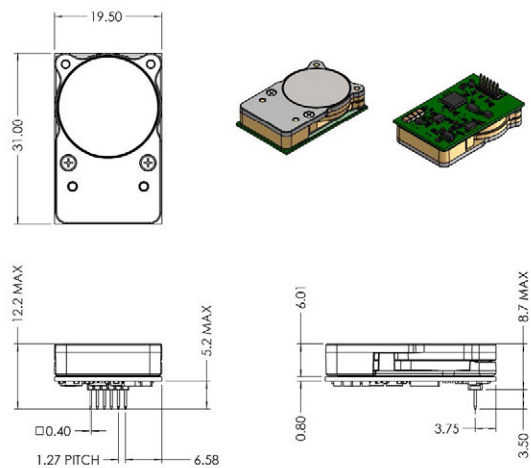

Pin-Out Description - CozIR® LP

Pin	Name	Type	Description
1	GND	Supply	Sensor ground
2	VDD	Supply	Sensor supply voltage
3	Rx_In	Digital Input	UART Receive Input
4	Tx_Out	Digital Output	UART Transmit Output
5	NC	Unused	Do not connect
6	NC	Unused	Do not connect